

R TO MARKET™



OzoCoat+ Technology




CERTIFIED BY
SCS Global Services

OZOG RIP® GALLERY COLLECTION

OZOGRIP® GALLERY

Like fine pieces of artwork, the OzoGrip® Gallery Collection features unique textures and colors. They are a great compliment to our existing wood plank, tiles and woven textured patterns. OzoGrip® Gallery can be installed loose-lay, or for higher abuse or healthcare environments, with a releasable spray adhesive. It is great for raised access floor! Want to do a herringbone, arc or radius cut using multiple colorways? Unlike a click product, you are able to create patterns with OzoGrip®. Its 4mm and 5mm thickness allows for use over most existing substrates but carpet*, minimizes bad slab issues and is suitable for projects with extremely high moisture levels. It also needs no adhesive cure time, so your space can be immediately occupied. The thick nature of OzoGrip® products contribute to a quieter environment and all patterns are no-wax, no-buff, no strip. Just sweep, vacuum or damp mop for a long-lasting, colorfast, releasable floor.

*See installation manual for full listing

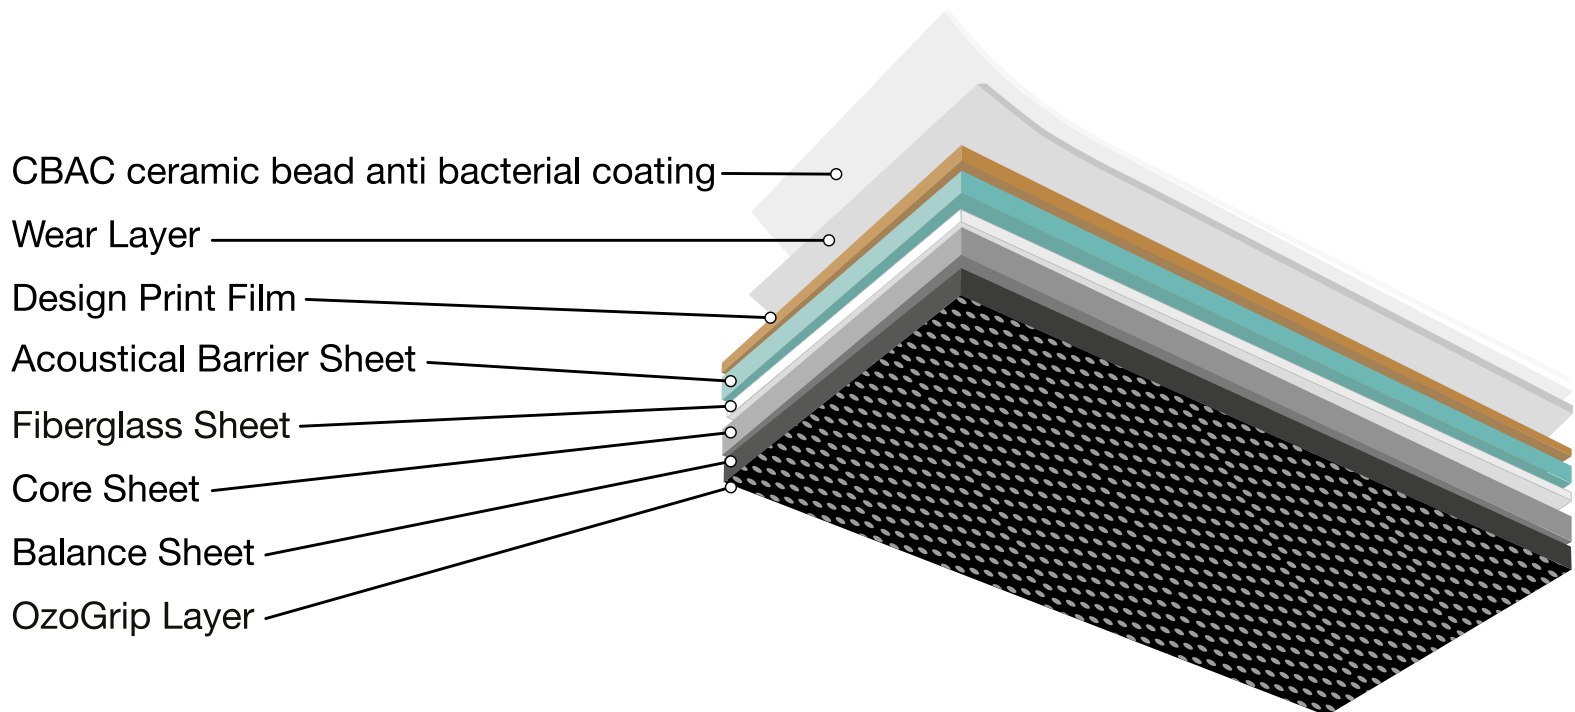

FEATURES AND BENEFITS

- Twice as thick as standard vinyl flooring
- Heavier weight allows for installation over almost all existing floors, except for carpet, with minimal to no floor prep
- High grade fiberglass is a sheet, offering greater dimensional stability than the chipped or mesh fiberglass offered in lesser products. This assures much less expansion and contraction.
- Covers minor surface irregularities on existing subfloors
- Product will not chip or crack
- 100% water resistant
- ISO-9001 and ISO-14001 certified
- Floor Score™ Certified
- 75% recycled content
 - 52.5% is Post-Consumer
 - 22.5% is Pre-Consumer
- Ceramic bead protective coat is fused in the wear layer through a patented thermal bonding process
- Ozocoat+ Technology is added within the ceramic bead layer for anti-microbial, anti-bacterial and anti-fungal protection.
- Contributes to excellent indoor air quality with little or no VOCs, is non-allergenic and can be totally recycled.
- Does not require a toxic wax or finish coat, which supports a healthier indoor air quality. Our floor is truly “No Wax/No Buff/No Strip”.
- 10 Year Commercial Limited Warranty

FOR SAMPLING, CLICK ON PRODUCT THUMBNAI



TATE TM 401-4.0 MM / TATE TM 401-5.0 MM

7.08" X 47.24" PLANKS



ORSAY TM 657-4.0 MM / ORSAY TM 657-5.0 MM

9.25" X 59.25" PLANKS



TATE TM 301-4.0 MM / TATE 301-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 303-4.0 MM / TATE TM 303-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 409-4.0 MM / TATE TM 409-5.0 MM

7.08" X 47.24" PLANKS



ORSAY TM 655-4.0 MM / ORSAY TM-655-5.0 MM

9.25" X 59.25" PLANKS



TATE TM 410-4.0 MM / TATE TM 410-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 652-4.0 MM / TATE TM 652-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 403-4.0 MM / TATE 403-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 404-4.0 MM / TATE TM 404-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 405-4.0 MM / TATE TM 405-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 632-4.0 MM / TATE TM 632-5.0 MM

7.08" X 47.24" PLANKS



TATE TM 633-4.0 MM / TATE TM 633-5.0 MM

7.08" X 47.24" PLANKS



ORSAY TM 656-4.0 MM / ORSAY TM 656-5.0 MM

9.25" X 59.25" PLANKS



WHITNEY TM 101-4.0 MM / TATE 101-5.0 MM

12" X 24" TILES



WHITNEY TM 102-4.0 MM / TATE 102-5.0 MM


12" X 24" TILES



WHITNEY TM 105-4.0 MM / TATE 105-5.0 MM 12" X 24" TILES



WHITNEY TM 106-4.0 MM / TATE 106-5.0 MM 12" X 24" TILES

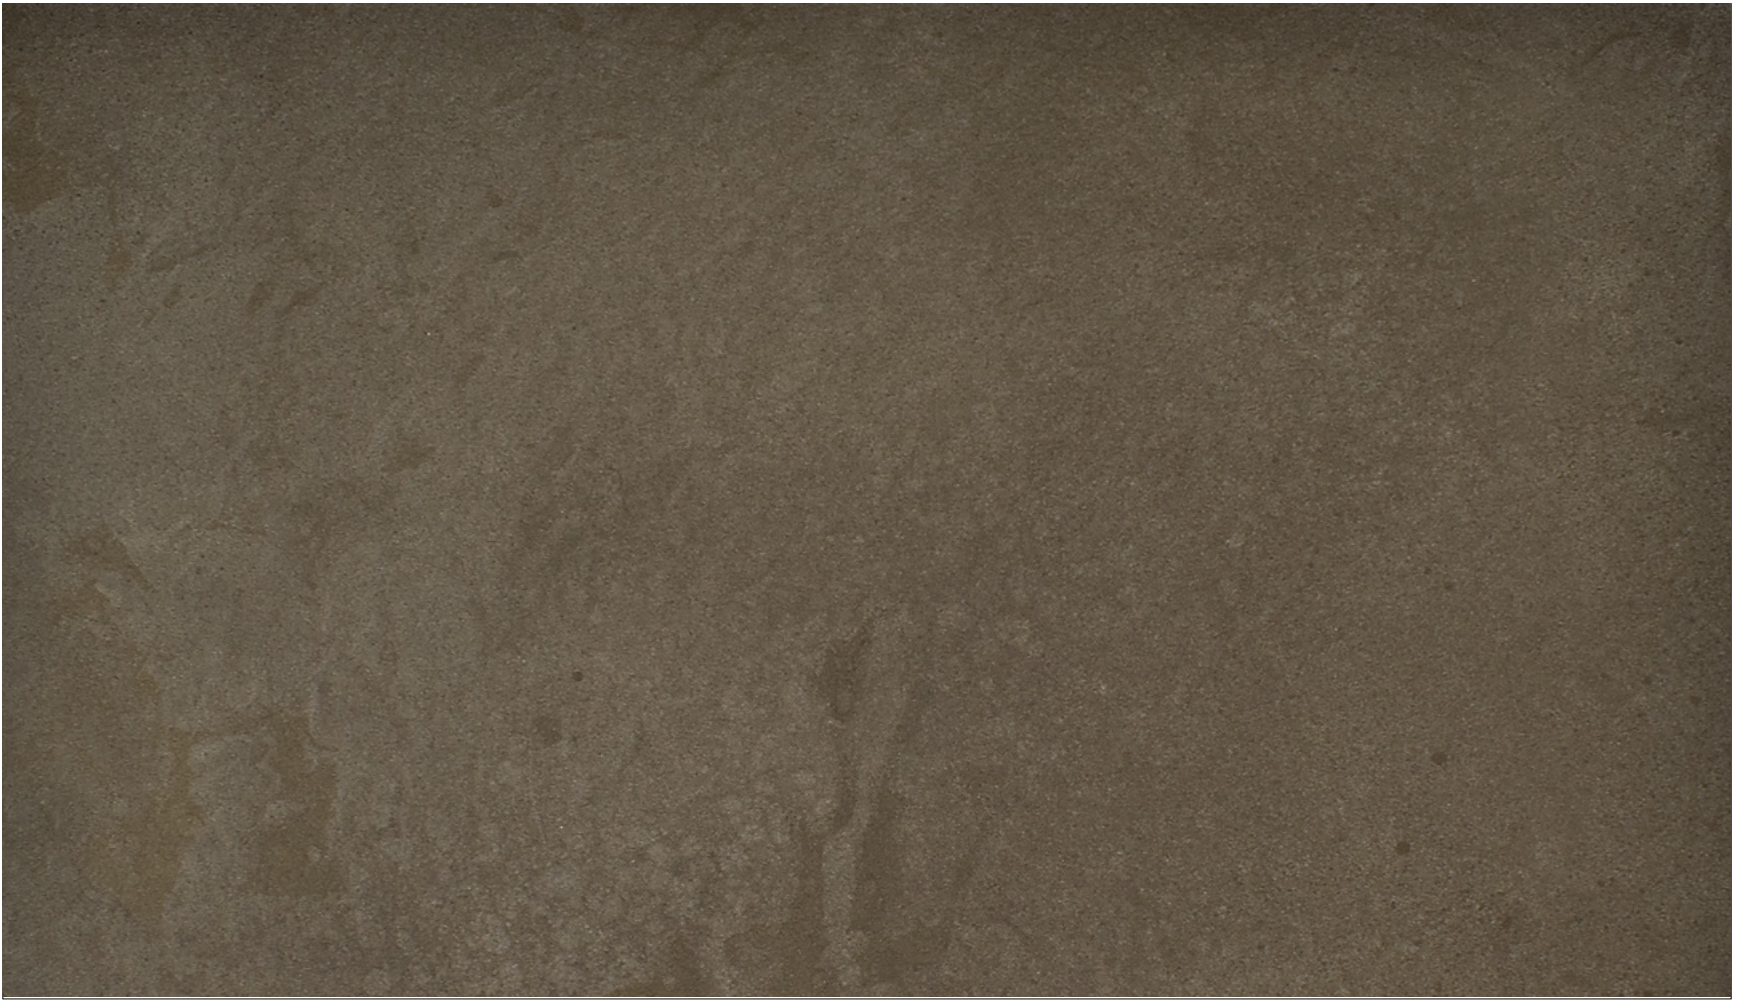

WHITNEY TM 107-4.0 MM / TATE 107-5.0 MM

12" X 24" TILES



MOMA TM 701-4.0 MM / MOMA 701-5.0 MM

12" X 24" TILES



MOMA TM 702-4.0 MM / MOMA 702-5.0 MM

12" X 24" TILES



MOMA TM 703-4.0 MM / MOMA 703-5.0 MM

12" X 24" TILES

OZOGRIP® GALLERY SPECIFICATIONS

STYLE NAME Ozogrip® Gallery Collection
Tate, Orsay, Whitney and MoMa

INDOOR AIR SCS-EC10.3-2014
QUALITY

SIZE Tate: 7.08" x 47.24" planks
Gauge: 4.0 mm
12 planks/carton 2.32 s/f per plank
27.95 s/f carton

Tate: 7.08" x 47.24" planks
Gauge: 5.0 mm
10 planks/carton 2.32 s/f per plank
23.25 s/f carton

Orsay: 9.25" x 59.25" planks
Gauge: 4.0 mm
8 planks/carton 3.8 s/f per plank
30.46 s/f carton

Orsay: 9.25" x 59.25" planks
Gauge: 5.0 mm
8 planks/carton 3.8 s/f per plank
30.46 s/f carton

Whitney: 12" x 24" tiles
Gauge: 5.0 mm
10 planks/carton 2 s/f per plank
20 s/f carton

MoMa: 12" x 24" tiles
Gauge: 5.0 mm
10 planks/carton 2 s/f per plank
20 s/f carton

WEAR LAYER .5mm (20 mil)

FINISH Ozocoat+ Technology (Added for
anti-microbial, anti-fungal and
anti-bacterial protection)

FLOORSCORE® Certified SCS-FS-03764

COEFFICIENT OF FRICTION ASTM D2047 (James Method)
Exceeds ADA Requirements

REFERENCED SPECIFICATIONS ASTM F-1700, Class III, Type B,
Embossed Surface
(Meets or exceeds requirements
for composition, size, thickness,
squareness, flexibility, dimensional
stability, and resistance to chemicals)

CRITICAL RADIANT FLUX ASTM E648-08
Class I – 1.06 watts cm²

FLEXIBILITY ASTM F-137-08
Passes 6mm Mandrel

STATIC LOAD LIMIT ASTM F970-07 Passes
1,000 PSI Modified

MAINTENANCE Requires no wax, no stripping,
no buffing or toxic seal coat

WARRANTY 15-Year commercial warranty

RESISTANCE TO CHEMICALS ASTM F925-02
No surface dulling, surface attack, color
change (5 acetic acid, 70% Isopropyl alcohol,
mineral oil, 5% sodium hydroxide,
5% Hydrochloric acid, 5% ammonia, bleach,
5% phenol, gasoline, sulfuric acid,
Kerosene, and olive oil)

MOISTURE MAXIMUMS Up to 8lbs Ñ Calcium Chloride or
Hydrostatic Pressure Ñ
PH no greater than 11Ñ
RH no greater than 85%



OzoCoat+ Technology



TO MARKET 866-772-4772 • TOMKT.COM

Randy Eilts - President • Mobile: 972.743.9125 • Office: 855.372.7546